


Type

S4V

class C

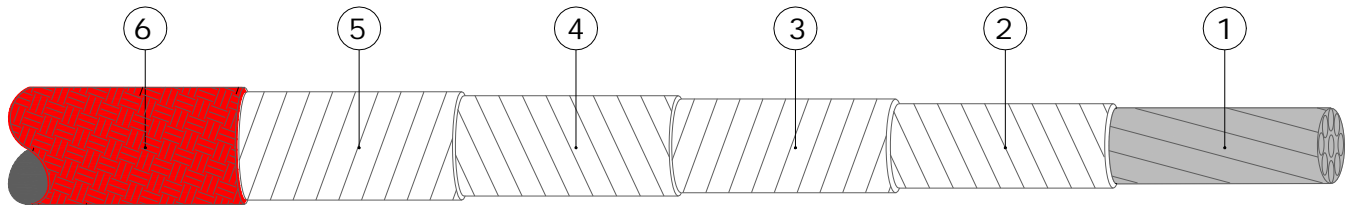

- 1 - Flexible conductor made of nickel
- 2 - Fiberglass spiral impregnated with silicone rubber
- 3 - Fiberglass spiral impregnated with silicone rubber
- 4 - Fiberglass spiral impregnated with silicone rubber
- 5 - Fiberglass spiral impregnated with silicone rubber
- 6 - Quartz fiberglass braid impregnated with silicone rubber

TECHNICAL DATA

- Working temperature of the insulating materials - 60°C + 400°C
- Temperature over short period 500°C
- Rated voltage 300/500V
- Voltage testing 3000V/20mA
- Maximum temperature of nickel 99,20% conductor 600°C
- Resistance to flame not propagate the flame, self-extinguishing
- Colouring of cable red
- Bending radius 5 x outer diameter
- Packaging coils or reels

OPTIONS

On request for minimum quantities you can have:

- Different colour of this cable 500 m
- Different construction of stranding with single wire \varnothing 0.20 - 0.30 - 0.40 mm 3000 m

Nominal size mm ²	Stranding n° wires x diam. mm	Outer diameter mm	Diameter tolerance mm
0.75	24 x 0.20	3.60	± 0.20
1	32 x 0.20	3.70	
1.50	21 x 0.30	3.90	
2.50	20 x 0.40	4.40	
4	32 x 0.40	4.70	± 0.30
6	48 x 0.40	5.10	
10	80 x 0.40	7.70	