


Type

GS 1

class H

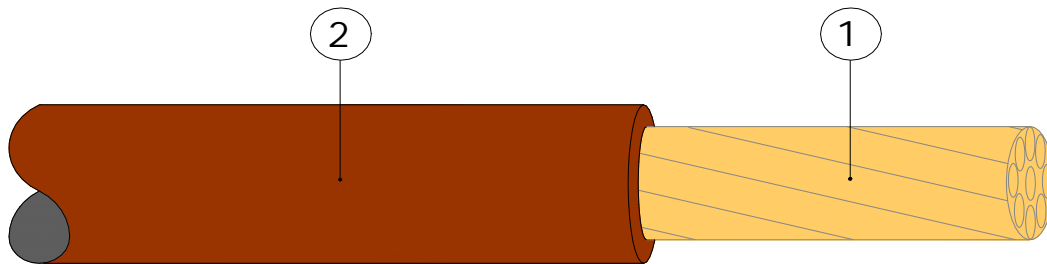

- 1 - Flexible conductor made of bare copper or tin plated copper
- 2 - Silicone rubber sheath

TECHNICAL DATA

- Working temperature of the insulating materials – 60°C +180°C
- Temperature over short period 230°C
- Rated voltage see table below
- Voltage testing see table below
- Resistance to flame not propagate the flame, self-extinguishing
- Impermeability excellent resistance to water
- Colouring of cable white or red brick
- Bending radius 4 x outer diameter
- Packaging coils or reels

Nominal size mm ²	Stranding n° wires x diam.mm	Outer diameter mm	Tolerance mm	Rated voltage Kv	Test voltage Kv
1	32 x 0.20	7	± 0.10	10	20
1.50	30 x 0.25	5		8	16
2.50	50 x 0.25	4		5	10