


Type

TTC

class C

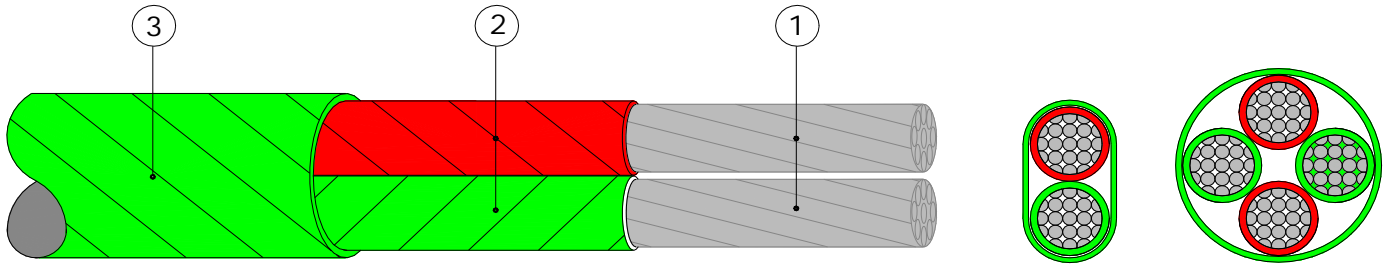

- 1 - Flexible conductor
- 2 - P.T.F.E. tape
- 3 - P.T.F.E. tape

TECHNICAL DATA

- Working temperature of the insulating materials - 100°C + 260°C
- Temperature over short period 280°C
- Alloys temperature range and technical data see Technical Data Alloys
- Resistance to flame not propagate the flame, self-extinguishing
- Impermeability excellent resistance to water
- Colouring according to the standards DIN43714 ANSI MC96.1 IEC 584-3
- Bending radius 5 x outer diameter
- Packaging coils or reels

OPTIONS

On request for minimum quantities you can have:

- Conductor with rigid wire 500 m
- Two wire twisted 300 m
- Different construction of stranding with single wire Ø 0.20 - 0.30 - 0.40 mm 3000 m

Nominal size mm ²	Stranding n° wires x diam. mm	Diameter		Type
		Outer mm	Tolerance mm	
2 x 0.22	7 x 0.20	1.20 x 2.00	± 0.15	Jx Kx Wx
2 x 0.35	11 x 0.20	1.40 x 2.40		
2 x 0.50	6 x 0.32	1.55 x 2.70		
2 x 0.80	10 x 0.32	1.85 x 3.30		
2 x 1	12 x 0.32	1.95 x 3.50		
4 x 0.22	7 x 0.20	2.00		
4 x 0.35	11 x 0.20	2.40		
4 x 0.50	6 x 0.32	2.70		
4 x 0.80	10 x 0.32	3.30		
4 x 1	12 x 0,32	3.50		