


Type

VVRR

class C

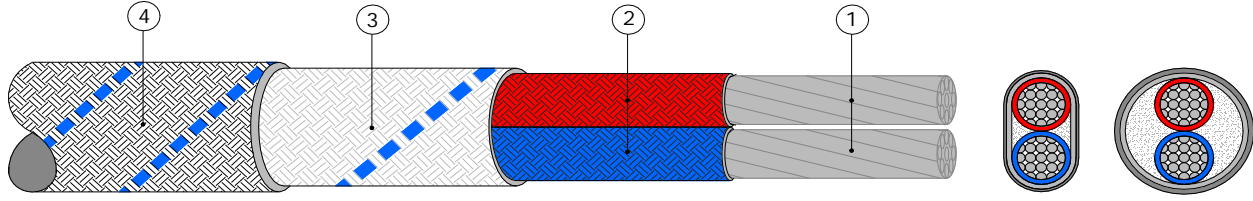

- 1 - Flexible conductor
- 2 - Fiberglass braid impregnated with resin
- 3 - Fiberglass braid impregnated with resin
- 4 - Tin plated copper braid

TECHNICAL DATA

- Working temperature of the insulating materials – 25°C + 250°C
- Temperature over short period 280°C
- Alloys temperature range and technical data see Technical Data Alloys
- Resistance to flame not propagate the flame, self-extinguishing
- Impermeability do not use in wet environments
- Colouring of cable according to the standards DIN43714 ANSI MC96.1 IEC 584-3
- Bending radius 6 x outer diameter
- Resin impregnation makes the braid rigid and mechanically resistant
- Colouring of conductors fully coloured
- Packaging coils or reels

OPTIONS

On request for minimum quantities you can have:

- Different construction of stranding with single wire Ø 0.20 - 0.32 mm 3000 m
- Braided stainless steel 304 500 m

Nominal size mm ²	Stranding n° wires x diam. mm	Outer diameter			Type
		Round type	Oval type	Tolerance mm	
2 x 0.22	8 x 0.20	3.00	3.05 x 2.00	± 0.20	Jx Kx Wx Tx Sx Rx Bx Bx ²
2 x 0.35	11 x 0.20	3.50	3.45 x 2.25		
2 x 0.50	6 x 0.32	3.80	3.65 x 2.35		
2 x 0.80	10 x 0.32	4.00	4.10 x 2.75		
2 x 1	12 x 0.32	4.15	4.15 x 2.85		